


Product description

Truck buffer GBT with standard version in natural rubber. Can also be ordered as follows:

- Rubber hardness: 45, 55 & 70 Sh(A)
- Rubber type CR, EPDM

Type	L [mm]	H [mm]	B [mm]	Holes pcs.	A [mm]	D ₁ [mm]	D ₂ [mm]
GBT 12515	125	15	40	2	60	19.7	8
GBT 12540	125	40	40	2	60	19.8	8
GBT 12550	125	50	43	2	60	20.3	8
GBT 12570	125	70	43	2	60	19.8	8
GBT 20060	200	60	52	2	120	26	10.5
GBT 20080	200	80	52	2	120	26	10.5
GBT 30060	300	60	52	3	115	26	10.5
GBT 30080	300	80	52	3	115	26	10.5
GBT 31535	315	35	60	3	157	26	12.5
GBT 40050	400	50	50	3	165	26	10.5
GBT 40060	400	60	52	3	165	26	10.5
GBT 40080	400	80	52	3	165	26	10.5
GBT 53035	530	35	60	4	157	26	12.5

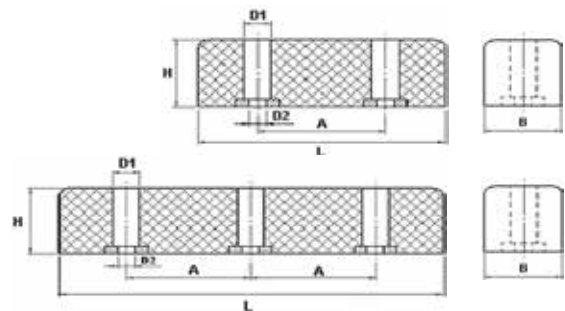

Product description

Truck buffer GBTM with metal insert. The standard version is in natural rubber, and it can also be ordered as follows:

- Rubber hardness: 45, 55 & 70 Sh(A)
- Rubber type CR, EPDM & Silicone, etc.
- The rubber can be stained



Type +	B [mm]	H [mm]	L1 [mm]	L2 [mm]	G [mm]	t [mm]	d [mm]
12515	60	60	150	136	M10x32	70	11
53035	100	100	200	168	M12x36	90	13

