




Product descriptions

Rubber truncated cone vulcanised on electro-galvanised steel washers. The anti-vibration mount is made of natural rubber. In the white colour code, a hollow version is produced for smaller loads.

Application

The anti-vibration mount can be used for damping noise and vibrations from small machine installations, for example, small fans, pumps, motors, compressors, converters and vibration tables.

The anti-vibration mount can also be used to isolate external vibrations, for example, radio transmitters, gauges, navigation instruments and vibration isolation of equipment during transport.

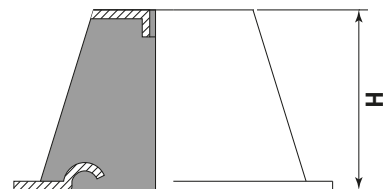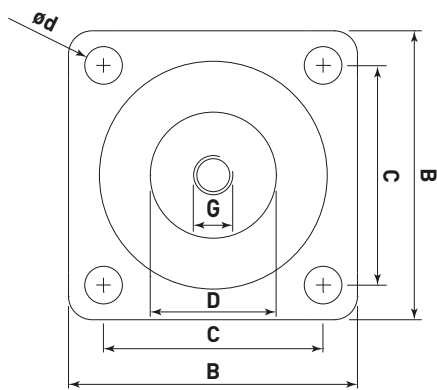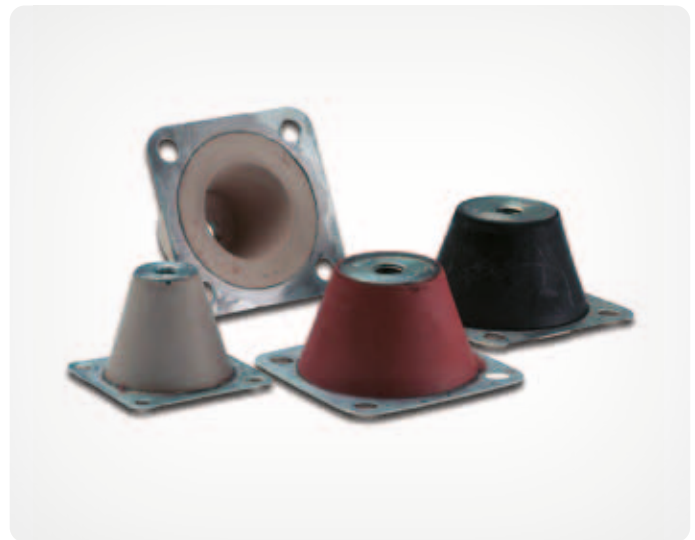

Type	Hardness / rubber colour	Hardness Sh(A)	Maximum load [kg]	Static deflection [mm]	Dimensions [mm]					
					D	H	G	B	C	ød
FA5035	White hollow	45	12	4.3	20	35	M8	50	39	5
	White	45	20	4.6			M8			
FA6535	White hollow	45	30	4.5	32	35	M10	65	48	7.5
	White	45	60	5.1			M8/M10			
	Red	55	90	5.6			M10			
	Black	65	120	5.9			M10			

