


WIRE ROPE ISOLATORS: 'HELICAL'

DEFINITION
series CB2300

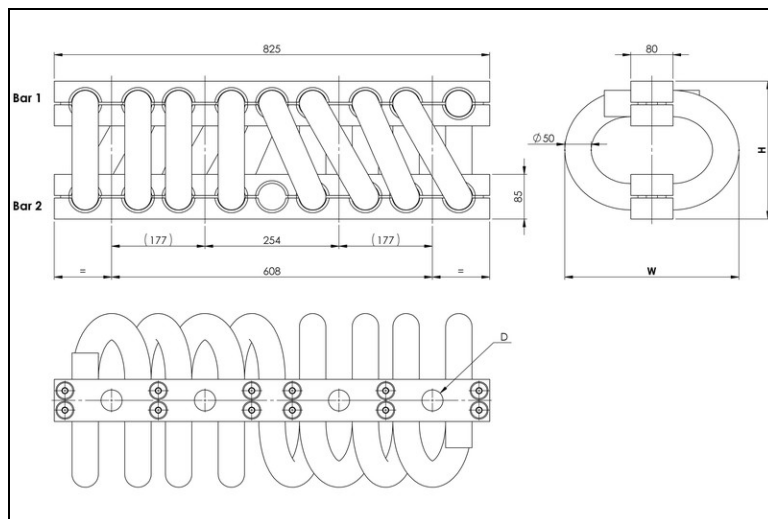

- All metal multidirectional anti-vibration/shock mounts
- Exceptional reliability and long life
- High damping
- No aging
- Corrosion resistant
- Unequalled temperature range : -180°C to +300°C / -290F to 570 F
- Great adaptability/versatility

Specials on request

(material size and number of loops, etc.)

Dimensions are in millimeters. For reference only

SERIES
Materials and finishes (meets RoHS requirements)
CB2300
Cable: stainless steel galvanized available: CBG
Retainer bars: aluminium alloy/ SurTec
Screws: alloy steel/ zinc plate
Inserts: stainless steel
All stainless steel: CBSS
Other materials on request

MODEL	height H (mm)	width W (mm)	weight (kg)
-12	262	330	80,4
-15	289	360	87,8
-17	320	395	96,4
-20	356	434	106,1
-30	397	480	117,3

INTERFACES	Bar 1	Bar 2	Bar 3
fixtures holes D	4 through holes ø39mm	4 through holes ø39mm counter-sunk 60°	4 inserts M36
Bar 2	no suffix	not standard	not standard
4 through holes ø39mm	CM	CM2	not standard
4 through holes ø39mm counter-sunk 60°	IM	CIM	IM2

C	B	2	3	0	0	-	1	2	C	I	M
---	---	---	---	---	---	---	---	---	---	---	---

SERIE: CB2300

'Helical' mount from the CB2300 series

MODEL: -12

height: 262mm

width: 330mm

weight: 80,4kg

loops: serie

standard is 08 loops




INTERFACE: CIM

4 through holes ø39mm

counter-sunk 60° in bar 1,

4 inserts M36 in bar 2



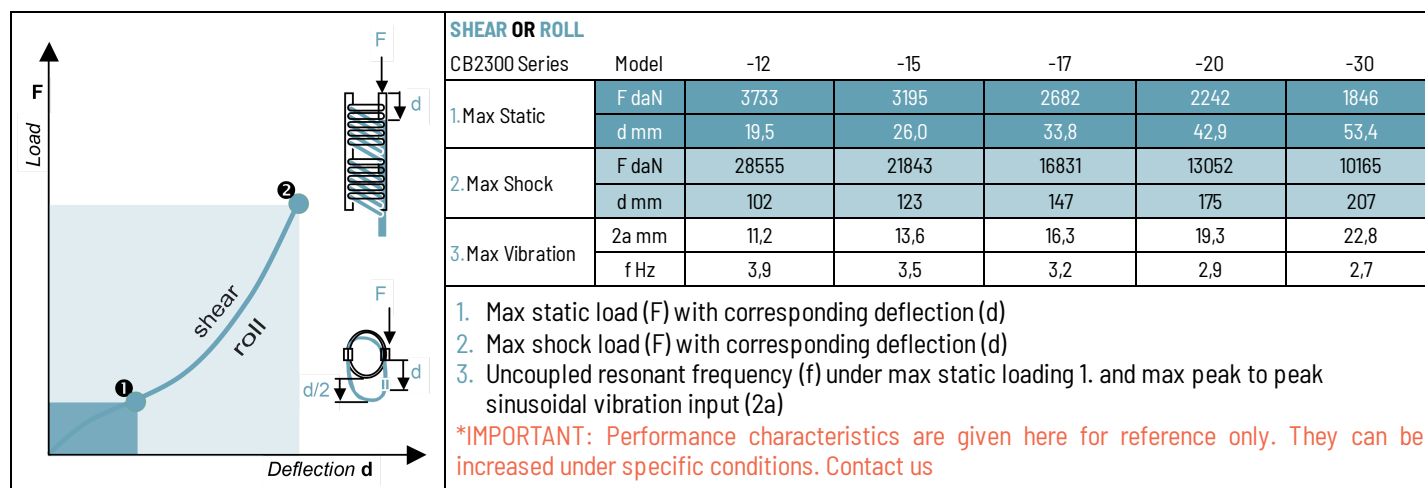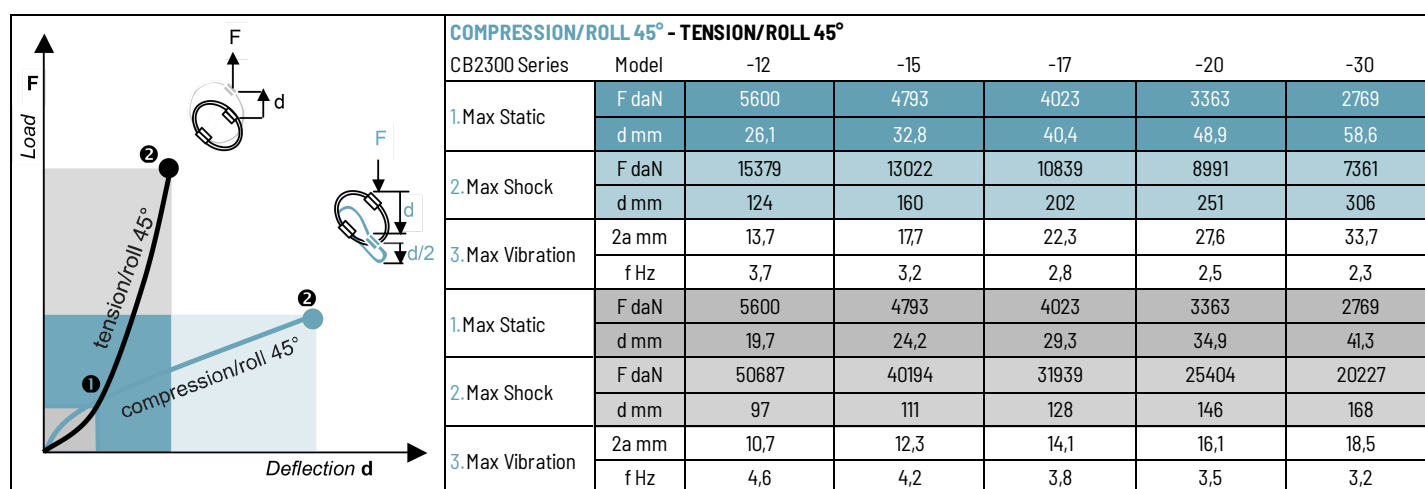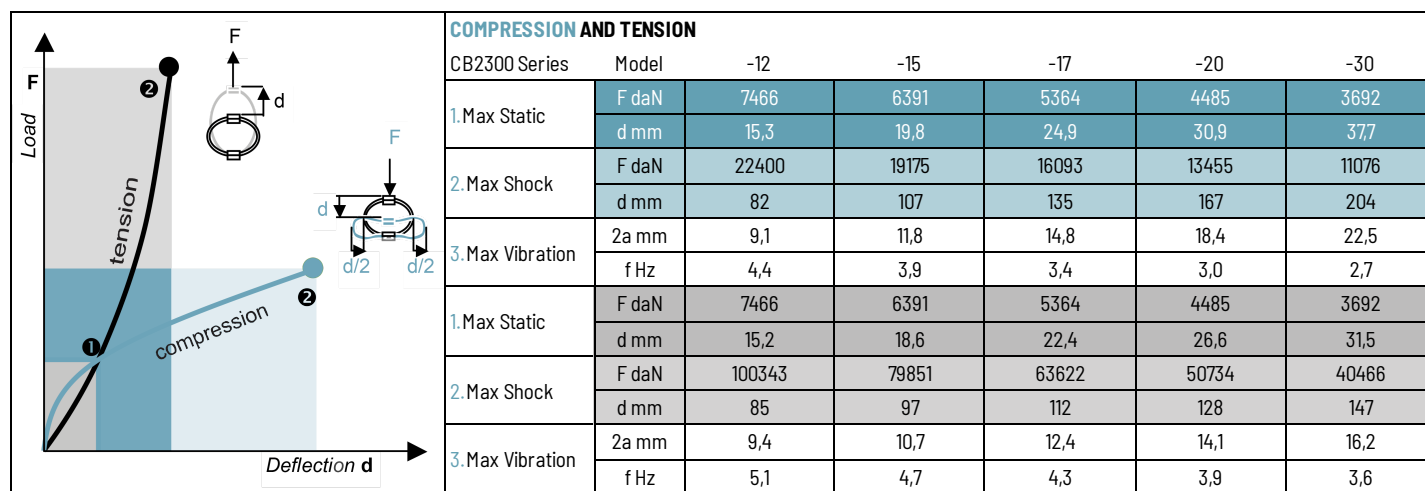

TYPICAL SHOCK/VIBRATION SPECIFICATIONS:

Air	AIR 7306, MIL-E-5400, MIL-C-172, MIL-STD-810
Ground Forces	GAM EG13A, SEFT 001, MIL-STD-810, VG 9533
Marine	GAM EG13C, IT25-21/96-31/15-86, MIL-S-167, MIL-S-901, STANAG 042, BV 043.73, BV 044
Others	GAM EMB1, GAM EMBT4, DEF STAN 07-55, IEC 571, FINABEL 2C