


WIRE ROPE ISOLATORS: 'HELICAL'

DEFINITION
series CB61400

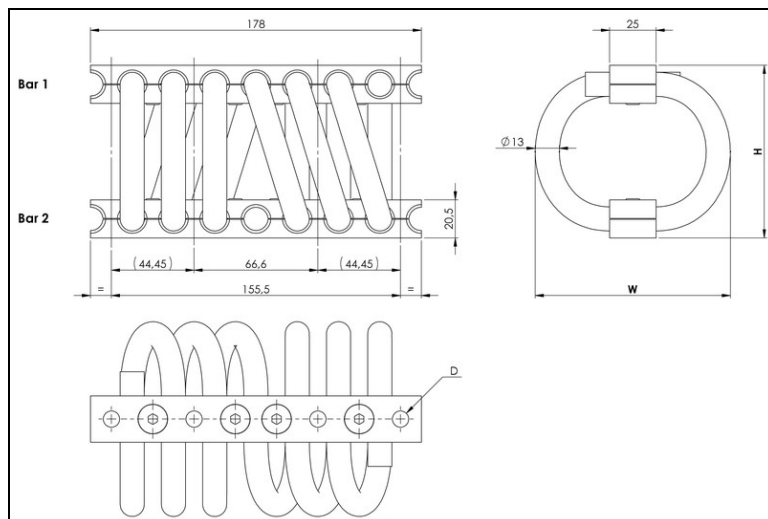

- All metal multidirectional anti-vibration/shock mounts
- Exceptional reliability and long life
- High damping
- No aging
- Corrosion resistant
- Unequalled temperature range : -180°C to +300°C / -290F to 570 F
- Great adaptability/versatility

Specials on request

(material size and number of loops, etc.)

Dimensions are in millimeters. For reference only

SERIES
Materials and finishes (meets RoHS requirements)
CB61400
Cable: stainless steel galvanized available: CBG
Retainer bars: aluminium alloy/ SurTec
Screws: alloy steel/ zinc plate
Inserts: stainless steel
All stainless steel: CBSS
Other materials on request

MODEL			
	height H (mm)	width W (mm)	weight (kg)
-10	76	84	1,2
-12	76	92	1,3
-15	83	102	1,4
-17	89	105	1,5
-20	95	121	1,6
-30	108	133	1,8
-40	124	143	1,9
-50	137	156	2,1
-60	155	180	2,4
-70	166	186	2,5
-80	175	210	2,7

INTERFACES			
fixtures holes D	Bar 1		
	4 through holes ø8,4mm	4 through holes ø 8,4mm counter-sunk 90°	4 inserts M8
Bar 2			
4 through holes ø8,4mm	no suffix	not standard	not standard
4 through holes ø8,4mm counter-sunk 90°	CM	CM2	not standard
4 inserts M8	IM	CIM	IM2

C B 6 1 4 0 0 - 1 0 C I M

SERIE: CB61400

'Helical' mount from the CB61400 series

MODEL: -10

height: 76mm

width: 84mm

weight: 1,2kg

loops: serie

standard is 06 loops




INTERFACE: CIM

4 through holes ø 8,4mm

counter-sunk 90° in bar 1,

4 inserts M8 in bar 2



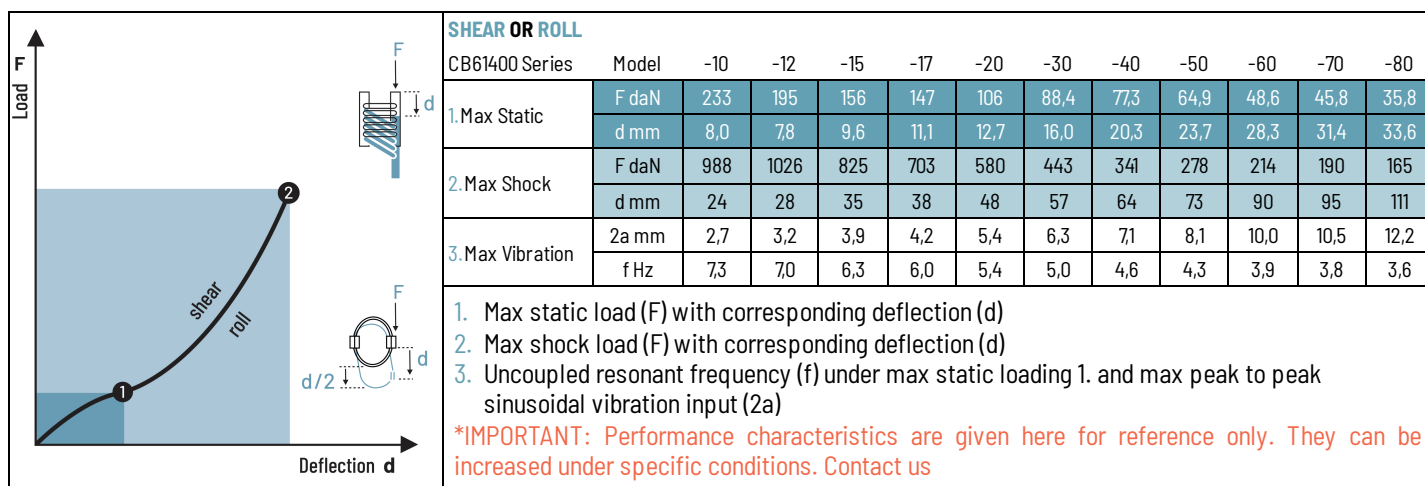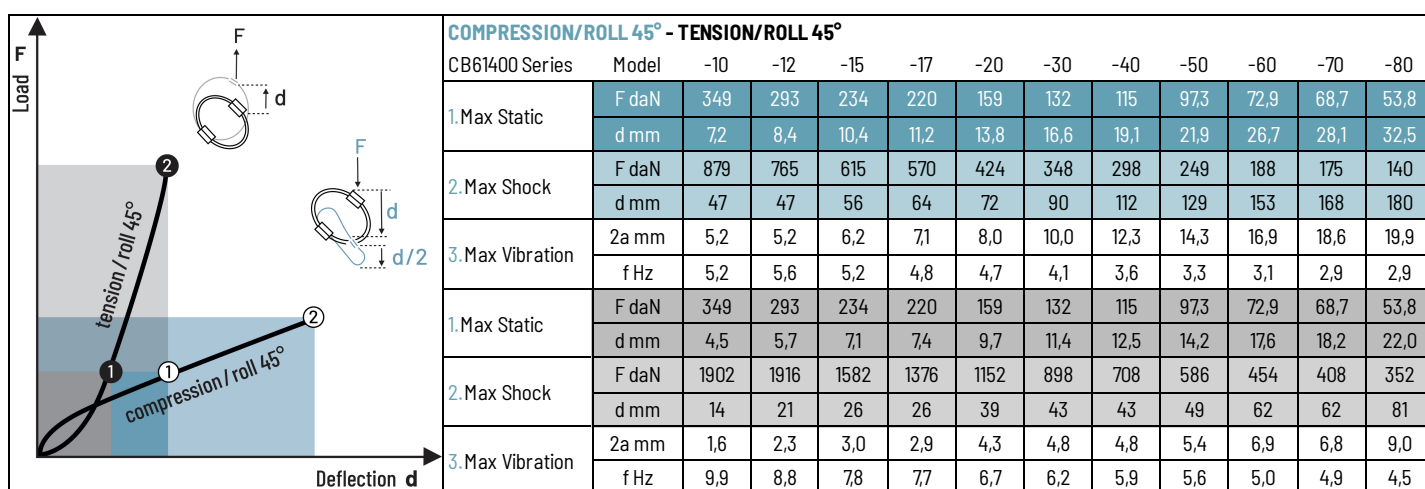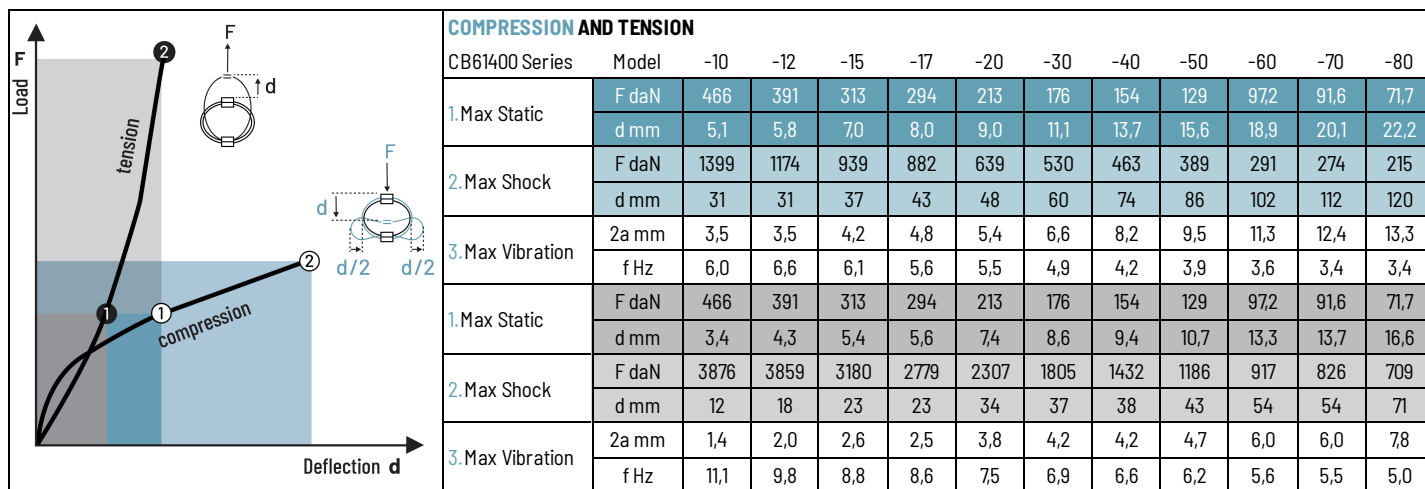

TYPICAL SHOCK/VIBRATION SPECIFICATIONS:

Air	AIR 7306, MIL-E-5400, MIL-C-172, MIL-STD-810
Ground Forces	GAM EG13A, SEFT 001, MIL-STD-810, VG 9533
Marine	GAM EG13C, IT25-21/96-31/15-86, MIL-S-167, MIL-S-901, STANAG 042, BV 043.73, BV 044
Others	GAM EMB1, GAM EMBT4, DEF STAN 07-55, IEC 571, FINABEL 2C